

DATI TECNICI PER ELEMENTO / TECHNICAL DATA PER ELEMENT

| modello model | profondità thickness | altezza (H) height | interasse centres | larghezza width | peso unloaded weight | cont. H ₂ O water capacity | resa termica thermal power | |
|------------------|-------------------------|-----------------------|----------------------|--------------------|----------------------------|---|-------------------------------|----------|
| REED | (mm) | (mm) | (mm) | (mm) | (Kg) | (lt) | (W) | (Kcal/h) |
| V180 | 45 | 1800 | 1778 | 35 | 0,79 | 3,34 | 101 | 87 |
| V210 | 45 | 2100 | 2078 | 35 | 0,92 | 3,87 | 118 | 101 |


● funzionamento ad acqua
operates with water




Disponibilità Modelli / versione verticale: da 8-10-12-14-16-18-20 elementi (n°)

Availability of models / vertical version: 8-10-12-14-16-18-20 elements (n°)

Equazione caratteristica: $Km \Delta t^n$. Valori di potenza termica stimati presso il Politecnico di Milano secondo la norma **EN 442**. Pressione massima di esercizio di 6 bar, temperatura massima d'esercizio 120°C. Mozzo Ø: 1/2". Characteristic Equation: $Km \Delta t^n$. Thermal power values estimated at Milan Polytechnic in accordance with the **EN 442** norm. Working pressure does not exceed 6 bar, maximum working temperature: 120°C. Hub Ø: 1/2".

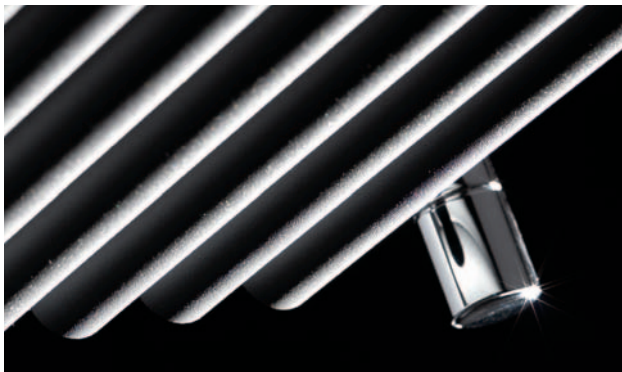

Connessioni verticale / Vertical joint: 100-300-110-310-120-320

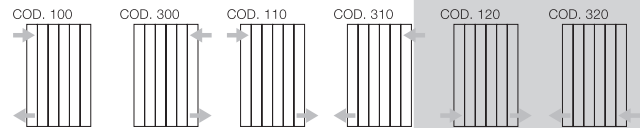

Finiture/Finishes:

Marrone/Brown (RAL 8017)
Gofrato/Textured




Opaco/Opaque (RAL 9005)
Gofrato/Textured




Antracite/Anthracite (ANT)
Gofrato/Textured



Metallico/Metallic (RAL)
Gofrato/Textured



Bianco/Shiny (RAL 9010)
Gofrato/Textured



Bianco Tradiz./Traditional (RAL 9003)
Gofrato/Textured



Bianco/White (WHI)
Gofrato/Textured

